BLUETOOTH MONAURAL HEADSET USER MANUAL

MODEL 175340

MANHATTAN

MAN-175340-UM-0906-01

Thank you for purchasing the MANHATTAN® Bluetooth Monaural Headset, Model 175340. Read this manual carefully before you start using this headset so that you're familiar with the functions and to ensure that any device you intend to use with this headset is compatible with Bluetooth specification V1.1 or V1.2 and supports the Bluetooth headset or hands-free profile.

This headset uses Bluetooth technology to create a wireless connection with your Bluetooth device, such as a cellular/mobile phone or a desktop or laptop computer (with audio gateway profile support).

SAFETY INSTRUCTIONS

Usage Safety

Before using this product, read thisr manual carefully so that you understand each of the headset's functions. Safe and effective operation is also dependent on following these simple suggestions:

- Do not let children play with this product. As with any item small enough to be placed in the mouth and swallowed, there is a risk of choking.
- Do not use any liquid-spray cleaning products to clean this product.
- Do not try to disassemble this product yourself. If you suspect that the product has a defect, contact your MANHATTAN dealer for assistance.

FCC Safety Information

The MANHATTAN Bluetooth Monaural Headset complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not be used to cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

The radiated output power is far below the FCC radio frequency exposure limits. Nevertheless, this device should be used in such a manner that the potential for human contact during normal operation is minimized.

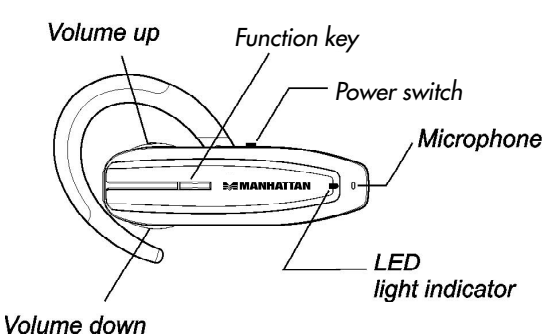

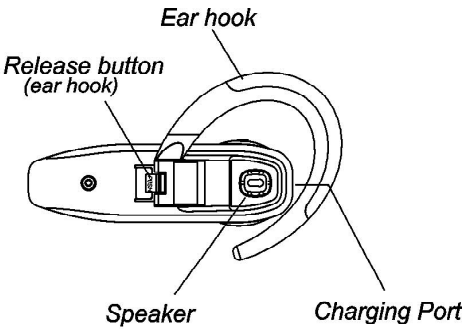

OPERATION

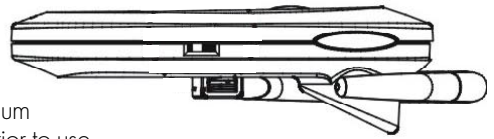

Charging the Headset

The headset is equipped with a lightweight, durable lithium polymer rechargeable battery, and must be charged prior to use.

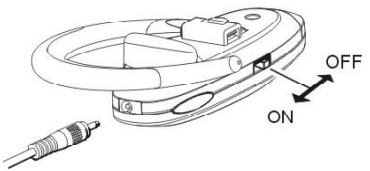

- Slide the power switch on the headset to the "on" position (toward the ear hook, as shown at right).
- Plug the travel charger into the charging port of the headset; the headset will automatically turn off.
- The red LED indicator will light while the headset is charging, and will turn off when the device is fully charged.

  NOTE: On first use, cycle the power switch on and off to turn the device off.
- When charging the headset the first time, allow the device to charge for at least for 4 hours. After the initial charge, normal charging time is about 2 – 3 hours.
- Do not use the headset during charging.
- Use only the provided charger.
- When the red LED indicator flashes, the battery level is low. Recharge the headset soon.

Power On/Off

With the power switch in the "on" position, press the function key 2 – 3 seconds to activate the headset. The blue indicator light will flash twice when the power is on. To turn the headset off, simply slide the power switch to the "off" position. *NOTE:* When switched on, the headset will sound a long tone.

Pairing the Headset

- Turn the headset on as instructed above.
- Make sure the Bluetooth capability of your mobile phone is turned on to search and pair with this headset. (For details, reference your mobile phone manual.)
- Your phone will find the headset and list "BT 257" under "Found Devices." Select "BT 257" to begin the pairing.
- Enter the PIN number "1234" and press "Yes." You can now use the headset.

NOTE: When pairing the headset, ensure that the headset and the mobile phone are no more than 1 meter (approximately 3 feet) apart, and that there is no metal obstacle between the two devices.

NOTE: The default PIN code is "1234." Enter the PIN code when prompted by your Bluetooth devices whenever pairing.

Wearing the Headset

The ear hook was designed to fit either ea comfortably. To wear the headset in the other ear, simply press the release button to remove the ear hook, then re-insert it (as shown) to change the position.

- Holding the headset, use your thumb and forefinger to stretch the ear hook and place it behind your ear.

To release from the right ear position:

To re-attach in the left ear position:

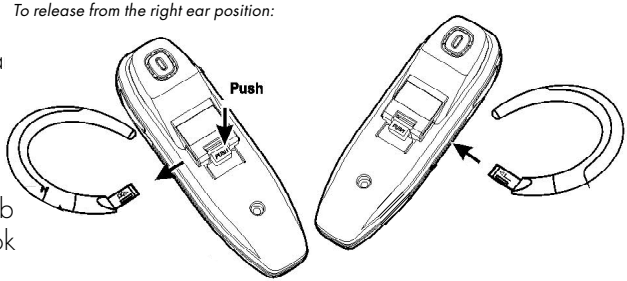

MANHATTAN

- Adjust the headset so the speaker rests comfortably in your ear canal.
- Position the microphone near your mouth.

Answering a Call

When you have an incoming call, wait until you hear a musical beep from the headset; then press the function key once to answer the call. *NOTE:* If you activate the auto answer function on your cell phone, then you do not need to press the function key on the headset to answer the call.

Rejecting/Ending a Call

To reject an incoming call ringing in your headset, press and hold the function key for 2 – 3 seconds until you hear the long tone. To end a call, press the function key again, or your phone's "End" key once.

Making a Call

To make a call, dial through your cell/mobile phone.

Voice Dialing

If your cell phone supports a voice dialing function, you can use this function after you save voice tags on your phone.

- Under "Standby Mode," press and release the function key once. You will hear a short beep from your headset.
- Say the voice tag into the microphone of the headset, and your phone will auto dial the number.

NOTE: The performance of Voice Dialing depends on the specifications of your cell/mobile phone.

Re-dialing the Last Call

To redial the last call, place the headset in Standby mode, then press and hold down the "Volume Down" button for 2 – 3 seconds until you hear the tone. Release the button, and the headset will automatically dial the number of the last call through your cell/mobile phone.

Volume Control

To increase the volume on the headset, press the "Volume Up" button repeatedly until the desired volume level is attained. To decrease the volume, press the "Volume Down" button repeatedly.

SPECIFICATIONS

- Bluetooth specification: v 1.2, Class 2
- Frequency range: 2400 – 2483.5 MHz
- Spread Spectrum: FHSS (79 channels) USA/EU
- Modulation: GFSK (Gaussian Frequency Shift Keying)
- Data rate: 64 kbps synchronou
- Compatibility: supports GAP, SDP, Bluetooth, hands-free and audio gateway profiles
- Security: pairing, encryption and authentication
- RF output power: -20 dBm – +3 dBm
- Effective range: up to 10 m (32 ft.)
- Battery type: 3.7 V / 120 mAh rechargeable lithium-polymer (included)
- Charging time: 2 – 3 hours
- Dimensions: 59 x 22 x 15 mm (2.3 x 1.0 x 0.6 in.)
- Weight: 17 g (0.6 oz.)

MANHATTAN

www.manhattan-products.com

Are you completely satisfied with this product?
Please contact your MANHATTAN® dealer with comments or questions.

Copyright © MANHATTAN
All products mentioned are trademarks or registered trademarks of their respective owners.